

Specifications sheet

Your quiet space for undisturbed meetings and deep work



Tuesday booths are built to the highest standards, ensuring the best sound insulation and noise reduction. With Tuesday booths, you can be sure of a peaceful and productive work environment, no matter how noisy your surroundings may be.



Product features



Ventilation

Air flow at 78 m³/hr refreshing



Sustainability

Recycled materials approx ≥180kg



Passive Lightning *4000k (150Lx) Daylight LED lighting



Magnetic Door System



Electrical

220-240v power socket (UK *Energy Saving Motion



Work Desk

Designed ergonomically



Leading The Sound Pod Industry

Leading the Sound Pod Industry STC 30 dB & RT0.25s




Sofa

for meetings or working on

~

Product Specifications



W 220cm (ext.) / 210cm (int.)

Exterior:

2200w x 1220d x 2200h

Interior:

2100w x 1100d x 2100

Capacity:

1-4 peopl

Weight:

459kg (Pod+Furniture)

Power requirements:

Equipped with a directional task lighting bar and singular UL/CE 220-240v power socket (UK or EU) 2x USB, 1x USB-C.

Sound/NIC rating:

Leading the Sound Pod Industry STC 30 dB & RT0.25s NIC=25dB D/C50, 0.76 STI A+

Airflow

78 m3/hr. Refreshing air every two minutes guaranteeing excellent oxygen rates.

Projected area

0 99m







Material

Carbon acoustic plate, PET acoustic plate, Polyester Iacoustic fiber, Aluminum, Stainless steel, ABS plastic.

Safety

Emergency Safety Hammer included for internal fitting.

Fire Rated Foam

UK Fire foam where required.









Modern Applications:

Lights, Power, Action! Within the Tuesday booth sits a mini sofa, cushioned for comfort but primarily for support, complimented by an organically curved task desk. Equipped with a directional task lighting bar and singular UL/CE 220-240v power socket (UK or EU) with 2 * USB and 1 * USB-C will power the devices required. The PIR sensor will help save on power, automatically turning o after 5mins of not being occupied.

Sound isolating double walls:

Our booths maintain a Rw+Ctr 30db (+5 db) by utilizing a market leading double walled technology.

Passive Lighting:

Tuesday booth also has non-directional main *4000k (150Lx) Daylight LED lighting, o ering a comfortable, well aired environment.

Air flow technology:

Replacing the air regularly within the Tuesday booth helps the occupant feel fresh and comfortable and surrounds them with fresh oxygen every 2 minutes, promoting health and wellbeing.

Flexible and movable:

Tuesday booth can be moved in minutes; lower the levelling legs allowing the castors to take over and move where ever you want!

Tuesday.



USER MANUAL

PRODUCT INTRODUCTION - Not weight: 411ag - Gross weight: 457bg - Venedation: 20-don'th - Manual pr - Manual pr

READ BEFORE START

- * Dear customer, Thanks for choosing our product, please mind these tips below during the installation:
- 1. Four people should be prepared for the installation;
- Please use cushioning material for stacking parts after unboxing in case of damaging the floor or product;
 Please don't scratch any part with a sharp tool;
- 4. Please check all listed tools are prepared;
- 5. Please check the space for installation is sufficient;
- 6. Please follow the step by number to build.

SCAN FOR ASSEMBLY VIDEO:




GETTUESDAY.CO

PRODUCT SPECS

- + External size: W2200*3220*H2200mm
- Internal size: W2095"01130"H1960mm
- Projected area: 2.86nf.
 Main material:
- Carbon plastic, PET, Aluminum, Stainless steel, ABS Furniture material:
- Birch plywood, Steel, Polywethane, PET







* Ingut power: 300-230V-50340KW * Output power: 300-220V-50/60Hs, SV Z SA * Maximum power: 3000W * Andrews Tight | 3.5% LTRUM. 4000s * Reading Tight | 3W, 4000K

PART LIST

0	Main part
0	- Upholstery
8	Furniture
0	Accessory
D	7-1


Code	Description	Qny.	Preview
V-01	Bottom panel	1	0
-02	Left side panel	1	\Diamond
A-03	Right side panel	1	\Diamond
4-04	Top panel	1	 ✓
V-05	Front frame (L)	1	1
N-06	Glass door	1	()
A-07	Front frame (R)	1	1
N-08	Rear panel (L)	1	1
N-09	Rear panel (M)	1	\$
A-10	Rear panel (R)	1	1


Code	Description	Qty.	Preview
3-01	Left wall	1	\Diamond
3-02	Right wall	1	\Diamond
3-03	Rear wall (L)	1	0
3-04	Middle rear wall (Upper)	1	\Diamond
3-05	Middle sear wall (Lower)	1	\Diamond
3-06	Right rear wall	1	0
3-07	Ceiling (L)	1	\Diamond
3-08	Ceiling (M)	1	\Diamond
3-09	Ceiling (R)	1	\Diamond
3-10	Carpet	1	


Code	Description	Qty.	Preview
E-01	Perforation socket wrench	1	0
E-02	Double head screwdriver	1	
E-03	M6 hex key wrench	1	
E-04	M4 hex key wrench	1	
E-05	M3 hex key wrench	-1	^


□ Furniture			
Code	Description	Qty.	Preview
C-01	Sofa	2	0
C-02	Desk	1	\Diamond
C-03	Bracket	1	
C-04	Desk foot	1	8
C-05	Desk leg	1	A


Code	Description	Qty	Preview
D-01	Caster	40	
D-02	Bolt	45	- M
D-03	Eccentric wheel	45	8
0-04	Level	1	(Mag)
0-05	Power cable	1	\$
0-06	Door handles	2	30
0-07	Air cushion	1	o≪>
0-08	Reading light	1	0
0-09	M6x12mm Bolt	40	62
0-10	M4x16mm Bolt	12	0
0-11	M6x20mm Bolt	7	0
0-12	M6x30mm Bolt	3	-
D-13	M5x12mm Bolt	2	0
0-14	ST4x16mm Bolt	4	8
0-15	ST3x25mm Bolt	2	
D-16	81.5x12x8mm Bolt	2	100

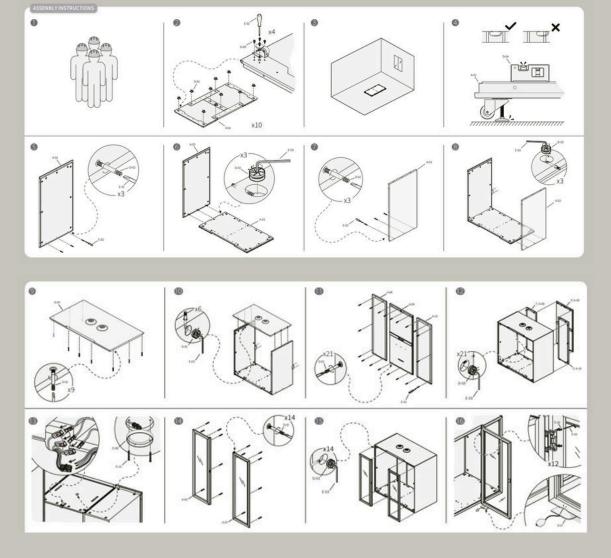


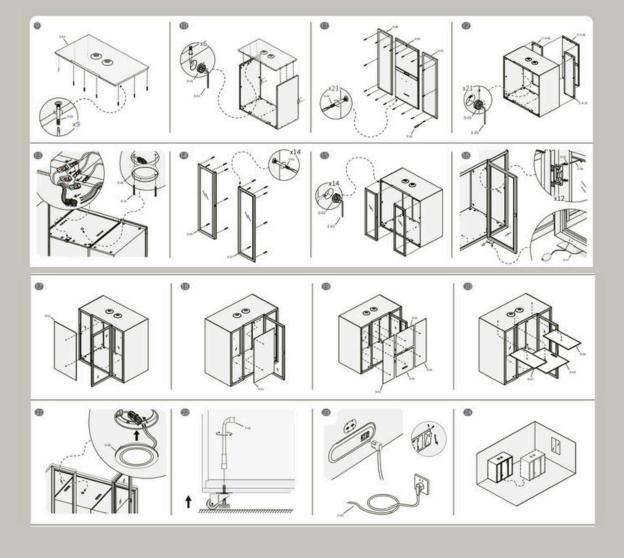





















Warning

-BDo not use any electronics exceeding 1000W in case of overload; ·MDc not use the product if the ventilation channels are blocked, keep the ventilation channels free fireign objects and debris; 155Protect all electric hardware from damage that cause electrical biskage,

*SDo not modify the original equiment in case of a short circuit;

"SDO not soutch glass with any sharp object; *SiDo not smake or light fires in the pod.

"Salways set the caster to the non-moving state;

"EDisconnect the power cord from the power outlet before starting any

*EDo not use the product if the ventilation is not functioning;
*EDo not climbing on top of the product or place any load on the top of the product.

*SDo not use this product in an environment with oxygen

concentration lower than 23.5%;
-SDo not slam the door;
-SDo not use this product outdoors.

Maintenance

*BPlease contact authorized personnel for repairing, don't operate without official instruction.

"IRDo not put anything heavier than 10kg on the desk;

"ISCut off the power supply if any maifunction occurs.

Problems and Solutions

- In case of on power from the power outlets and the fan or lamp don't work. *EMake sure the power cord is plugged in properly;

·SiCheck if the fuse is burnt out:

*#Check that the wire terminal is firmly connected to wire following the correct label.